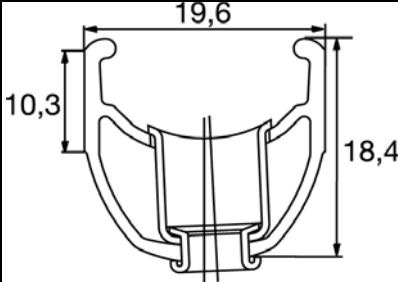



TECHNICAL SPECIFICATION

	Open Pro
Rim section	
Tecnologies	
Material	Maxtal
Valve hole diameter (in mm)	6,5
ETRTO compatibility	Ø 700 : 622x15 Ø 650 : 571 x 15
Recommended tire width (en mm)	19 => 28
Eyelet	Double
Nominal weight (in grams)	Ø 700 : 435 Ø 650 : 390
Recommended spoke nipple length (in mm)	12
Spoke support diameter (in mm)	Ø 700 : 602 Ø 650 : 551
Recommended rim tape (ETRTO x length x thickness)	Ø 700 : 622x18x0,6 Ø 650 : 571x18x0,6
Wear indicator	-